

## RM20

### Remote Paging Station



#### Description

This is a remote paging station used with MP600U and MP1000U. It has delicate and fashionable design with clear signal display. It is easy to operate with two switches to control paging. Stable and durable, it is an ideal choice for paging station.


#### Features

- Individual on/off switch of zones to control on/off of two zones on the amplifier.
- With signal level indication function, clear display of sound pressure.
- 2 types of Chime, one ascending tune, one drop tune.
- With RJ45 interface, connection distance up to 500m, no need of individual power adapter. power supply by MP600U or MP1000U.
- With MIC volume adjustment adjustment.

#### Specifications

| Model              | RM20                       |
|--------------------|----------------------------|
| Sensitivity        | ±10mV                      |
| Frequency Response | 200HZ-15KHz                |
| S/N Ratio          | ≥60dB                      |
| RJ45 Interface     | 485 communication protocol |
| Power Supply       | Powered by the host        |
| Dimensions (H×W×D) | 40×150×100mm               |
| Net Weight         | 0.55kg                     |

## Front Panel

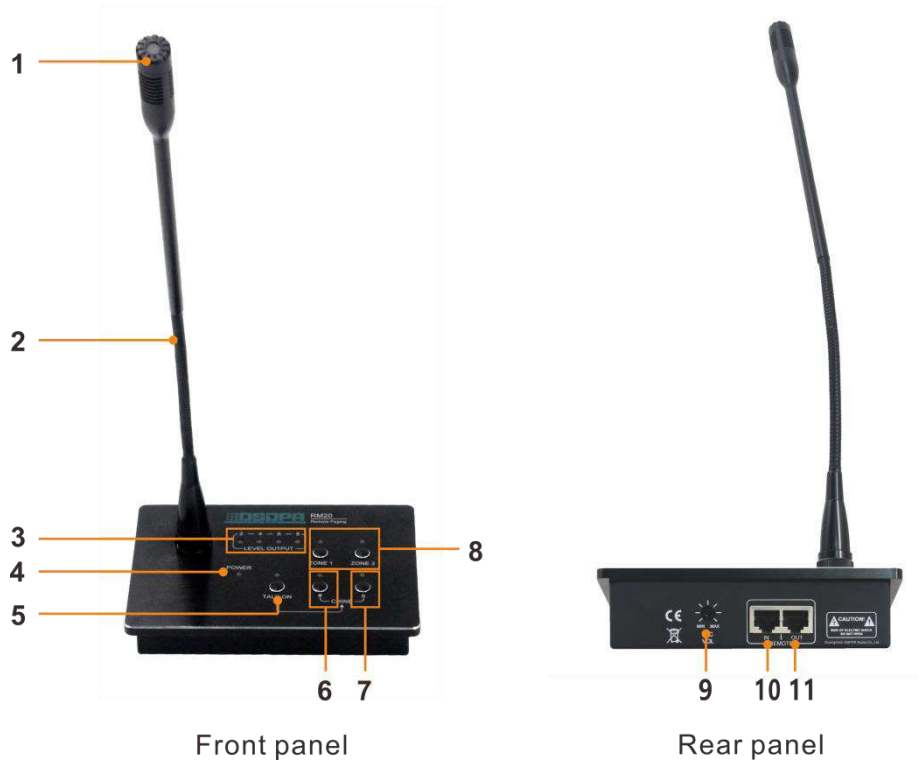

- 1. MIC
- 2. MIC rod (angle adjustable)
- 3. Signal indicator
- 4. Power indicator
- 5. MIC on/off switch (turned on when light on, press to start speaking)
- 6. Turn on MIC with ascending tune (enabled when light on, press to start speaking)
- 7. Turn off MIC with drop tune (enabled when light on, press to end speaking)
- 8. On/off switch of two zones (turned on when light on)
- 9. MIC volume adjustment knob
- 10. MIC extension interface
- 11. Connection interface with amplifier

## Address Settings

- 1. Long press the MIC switch button and Zone 1 button until the indicator flashes to set to address 1 successfully.
- 2. Long press the MIC switch button and Zone 2 button until the indicator flashes to set to address 2 successfully.
- 3. Long press the MIC switch button and turn on the MIC button until the indicator flashes to set to address 3 successfully.
- 4. Long press the MIC switch button and turn off the MIC button until the indicator flashes to set to address 4 successfully.

## Typical Application



Note: No more than 2 pagers at the same time .