


## DSP7011

### Ceiling Speaker System

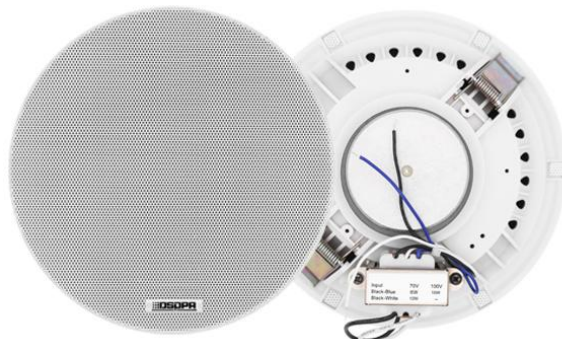

#### Description

The DSP7011 is a surface mount ceiling speaker with a 70V/100V transformer built in. The 70V/100V transmission is realized in a high-voltage, low-current mode, which makes longer distance transmission and parallel connection of multiple loudspeakers possible. It's easy to install with strong clip, and made of high-quality engineering plastic, which is durable, non-deformable and non-fading. It is an ideal choice for these places, such as schools, gymnasiums, square halls, parks, parking lots, railway stations, airports, villa communities and mall supermarkets, etc.

#### Features


- High quality anti-UV engineering plastic, long-term durability and fashionable;
- Fence structure can be avoid damaging speaker from roaches, rats etc.;
- Big power design (6-10W), long life, sounds clear and sonorousness;
- Different input voltage (70V/100V) can be chosen for different public address wires;
- Frequency response 120Hz-16kHz, maximum SPL. 92±2dB, High sensitivity 90±2dB, distortion<1.5%;
- Weight 0.9kg, equipped with clamps for installation.
- Cutout size:Φ165mm-170mm

#### Specifications


| Model                |      | DSP7011           |
|----------------------|------|-------------------|
| Frequency Range      |      | 120Hz -16kHz      |
| Rated Voltage        | 70V  | 6W/10W            |
|                      | 100V | 10W               |
| Sensitivity (1m, 1W) |      | 90dB±2dB          |
| Max. SPL(1m)         |      | 92dB±2dB          |
| Input Voltage        |      | 70V/100V optional |
| RMS                  |      | 10W               |
| Dimension            |      | φ185mm×74mm       |
| Weight               |      | 0.9kg             |

# Product Information


FREQ. RESPONSE

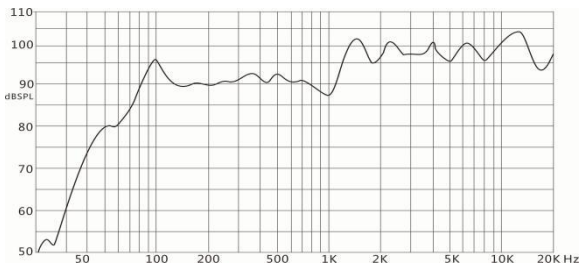

DISTORTION

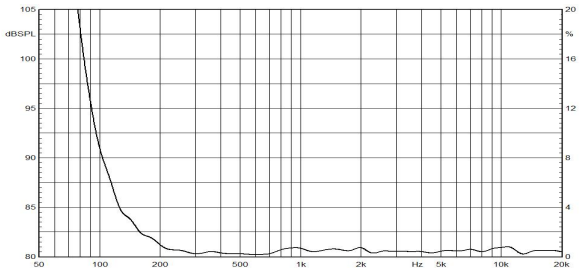

DIMENSIONS

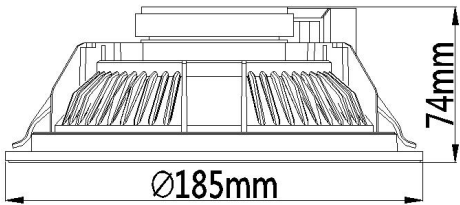

INSTALLATION HOLE

