

## DESCRIPTION


The SC-615 is a compact, highly intelligible speaker suited to public address announcement applications. Its external speaker component finished with powder coating, and stainless steel bracket and screws ensure the unit's weatherproof capability.

## SPECIFICATIONS

|                       |                                                                                                                                                                                                                                                           |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rated Input           | 15 W (Mobile Mount use: 10 W)                                                                                                                                                                                                                             |
| Rated Impedance       | 8 Ω                                                                                                                                                                                                                                                       |
| Sound Pressure Level  | 112 dB (1 W, 1 m at 500 Hz to 2.5 kHz peak level)                                                                                                                                                                                                         |
| Frequency Response    | 280 Hz – 12.5 kHz                                                                                                                                                                                                                                         |
| Dust/Water Protection | IP65                                                                                                                                                                                                                                                      |
| Polarity              | Hot: Black , Com: White                                                                                                                                                                                                                                   |
| Operating Temperature | –20 °C to +55 °C (must be free from dew condensation)                                                                                                                                                                                                     |
| Finish                | Horn flare: Aluminum, off-white, powder coating<br>Reflector horn and rear cover: ABS resin, off-white<br>Bracket, screws and bolts: Stainless steel<br>Speaker cable: Polyvinyl chloride insulated cabtyre cable<br>(6 mm in diameter, 600 mm in length) |
| Dimensions            | 222 (W) × 179 (H) × 234 (D) mm                                                                                                                                                                                                                            |
| Weight                | 1.1 kg                                                                                                                                                                                                                                                    |
| Option                | Swivel bracket: YS-151S (Can be used instead of the supplied bracket.)                                                                                                                                                                                    |

Note: Avoid installing the speaker in locations which vibrate considerably, or under environments easy to be oil-contaminated.

## APPEARANCE

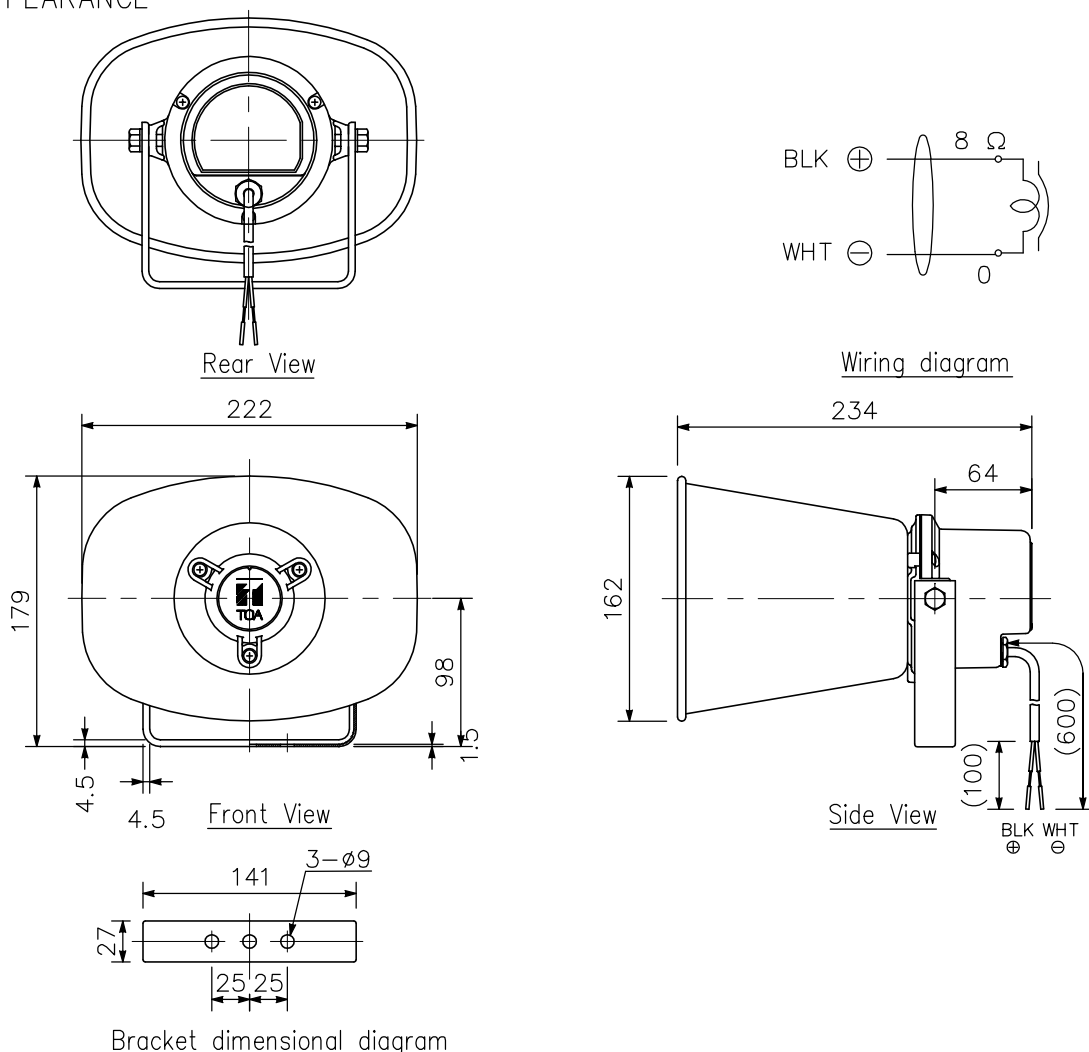

UNIT:mm SCALE:1/5

Note: Numerical values in parentheses are for reference only.