


DESCRIPTION

The Digital conference system's dedicated TS-D1000-CU Chairman unit can be instantly used by simply connecting it to the TS-D1000-MU or TS-D1100-MU Master control unit using CAT5e STP LAN cables. It can also be optionally equipped with either the TS-D1000-M1 Standard microphone or the TS-D1000-M2 Long microphone.

SPECIFICATIONS

Power Source	24 V DC (supplied from the TS-D1000-MU Master control unit (option), TS-D1100-MU Master control unit (option), TS-D1000-SU Sub control units (option) or TS-D1000-EX Extension units (option))
Power Consumption	1.5 W or less
Signal to Noise Ratio	65 dB or more (A-weighted)
Input	Microphone terminal: XLR-3-31 type
Output	Monitor speaker: 8 Ω , 0.4 W Earphone: ϕ 3.5 mm mini Jack (3P:monaural) $\times$ 2
Speaker Output	75 dB SPL
Connecting Terminal	RJ45 connector $\times$ 2
LED Indicator	Power indicator, Speech indicator
Function	Speech function, Priority speech function, Earphone volume control ($\times$ 2)
Operating Temperature	0 $^{\circ}$ C to +40 $^{\circ}$ C (32 $^{\circ}$ F to 104 $^{\circ}$ F)
Operating Humidity	90 %RH or less (no condensation)
Finish	Case: ABS resin, black, mat finish, paint Speaker net: Steel plate, black, mat finish, paint
Dimensions	208.9 (W) $\times$ 71.3 (H) $\times$ 160.5 (D) mm (8.22" $\times$ 2.81" $\times$ 6.32")
Weight	880 g (1.94 lb)
Option	Standard microphone: TS-D1000-M1 Long microphone: TS-D1000-M2

APPEARANCE

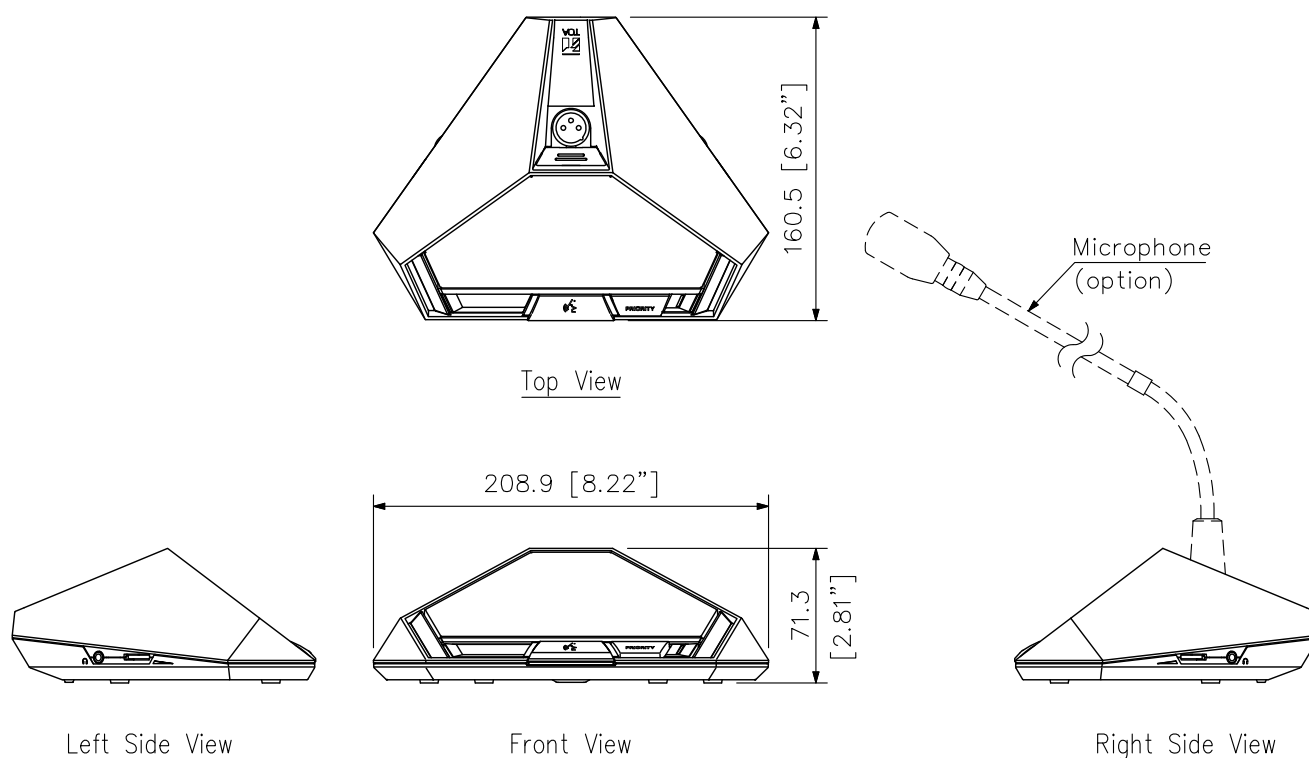

UNIT:mm SCALE:1/4